


4K Webcam Hardware Specifications

Introduction

The 4K Webcam is designed to enhance office meeting systems by delivering high-definition video and clear audio for professional-grade video conferencing. Equipped with advanced facial tracking, dynamic range adjustment, and superior low-light performance, this webcam ensures that every meeting is visually sharp and audibly clear, making it an essential tool for modern business communication.

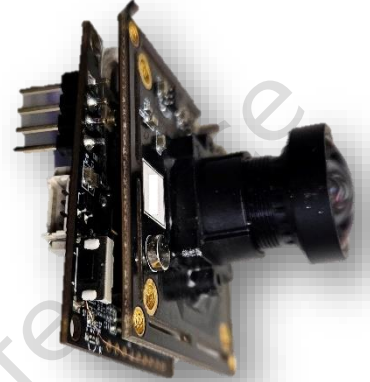

Product Description

- **Product Name:** 4K Webcam Solutions.
 - **Primary Use:** Optimized for office meeting rooms, video conferencing, and online collaboration.
-

Technical Specifications

- **MJPEG/H.264 Video Resolution and Frame Rates (Support Facial Tracking):**
 - 4K (3840x2160): 30 fps
 - 2K (2540x1440): 30 fps.
 - Full HD (1920x1080): 60 fps.
 - HD (1280x720): 60 fps.
 - VGA (640x480): 60 fps.

- **Field of View (FOV):** 112° ,Distance: 4~5m, or based on the lens spec.
 - **Focus:** Fixed Focus/ Auto Focus.
 - **Digital Zoom:** Support ePTZ.
 - **Dynamic Range:** Support HDR.
 - **Anti-Flicker:** Supports 50Hz and 60Hz to reduce flicker in various lighting setups.
 - **Sensor Size:** 1/2.8" sensor for superior image quality.
 - **CMOS Sensor:** SONY 4K 8.4MP CMOS Sensor
-

Audio Specifications

- **Microphones:** With single condenser microphone/ MEMS microphone.
 - **Noise Reduction:** optional, with extra chip support.
-

Connectivity

- **Connection Type:** USB-A, USB 2.0 protocol. UVC/ UAC
-

Reference Dimension

- **PCBA Dimension:** 38(L) * 38(W) * 28(H) mm.
-

Manufacturing Location

- **Design and Assembly:** Taiwan.